


SUPER GAINER

50/144/430MHz帯高利得3バンドモービルアンテナ
SG9700



レピーター対応型(意匠登録第865192号)
全方向回転ホイップ機構付(実用新案登録第1412570号)

取扱説明書



PASSION-RADIO.FR

Analogique - Numérique - SDR

このたびはスーパーゲイナーをお買い求めいただきまして誠にありがとうございました。ご使用の前に、この取扱説明書をよくお読みのうえ正しくお使いください。お読みになったあとは、大切に保存してください。

●特長

- ① このアンテナは自動車のフラッシュサーフェイス化にマッチするよう曲線を強調した新しいデザイン感覚のアンテナです。
- ② 144/430MHz帯については、アースを必要としないノンラジアルタイプのアンテナです。車の取付場所を選ばないのでトランクリッド、ルーフサイド、ハッチバックなどに取り付けられ、VSWRの変化が少なくなっています。
- ③ 430MHzはレピーター対応型です。
- ④ 接栓のセンターピンには24K金メッキを施しておりますので、きわめてロスの少ない構造になっています。
- ⑤ 全方向回転ホイップ機構付(実用新案登録第1412570号)なので車庫入れ時のめんどうなアンテナの取り外しが不要です。回転ホイップ部を引き上げれば360度どの方向へもエレメントを倒すことができます(アンテナエレメント折曲り機能)。

●アンテナの周波数調整方法

このアンテナは無調整タイプのアンテナです。特に、周波数調整が必要なときは回転ホイップ部におけるエレメントの上下スライドで行います。調整後はセットビスをしっかりと締め付けてください。

※ 多バンドアンテナのため、一つの周波数を調整すると、他の周波数が、ずれることがあります。


●ご注意

- ① 50MHz帯では車のボディーをラジアルとして使用しています。ボディーと基台が完全に導通していないとVSWRが下がらない場合がありますので十分ご注意ください。
- ② セットビスは走行中に多少ゆるむ場合がありますので、特に新しいアンテナについては締め付けを十分に行ってください。
- ③ このアンテナの回転ホイップ機構は全方向に倒すことができます。ただし走行中は倒さないでください。
- ④ 回転ホイップを使用する場合は、指など挟まないようにご注意ください。
- ⑤ アンテナエレメントが車のボディーに接近したり、他のアンテナの近くではVSWRが下がらない場合があります。
- ⑥ 50MHz帯は、51~52MHz FM専用となっています。

●送信空中線の型式

アマチュア無線局の免許申請書類の空中線型式には「単一型」とお書きください。

●VSWR表

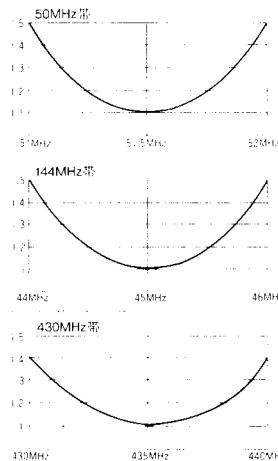

●パーツ名称(番号)




位相コイル 76102

…下部エレメント 76103

セットビス 76104 回転ホイップ 76105

…マッチングセクション 76106

●アンテナエレメントを倒す場合



●規格

利得／2.15dBi(51~52MHz FM)、3.0dBi(144MHz)、5.8dBi(430MHz)
耐入力／100W
インピーダンス／50Ω
VSWR／1.5以下
全長／1.07m
重量／340g
接栓／M形
形式／1/4λ(51~52MHz FM)、1/2λC-Loadノンラジアル(144MHz)、
5/8λ 2段C-Loadノンラジアル(430MHz)

■お買い上げいただきました製品は、厳重な品質管理のもとに生産されておりますが、万一運搬中の事故などによる破損がありましたら、取扱店にお申し付けください。
■アンテナの仕様および外観は、改良のため予告なく変更することがありますのでご了承ください。



PASSION-RADIO.FR

Analogique - Numérique - SDR

SUPER GAINER

6m/2m/70cm TRI-BAND HIGH PERFORMANCE MOBILE GAIN WHIP ANTENNA
REPEATER FREQUENCY COMPATIBLE
FOLD OVER STRUCTURE

SG9700

OPERATING INSTRUCTIONS

Description

1. THE SUPER GAINER series antennas employ our new design concept for the mobile whip antenna which emphasizes to go along well with recent aerodynamic car design.
2. Since the antenna employs radialless structure on 2m and 70cm bands, it works well at virtually any place on your car body. It can be located on trunk lid, roof gutter or any place without effecting vswr characteristics.
3. Repeater input/output frequencies compatible 70cm bands.
4. 24K gold plated center conductor is used in connector section of the antenna.
5. Fold over structure enables the antenna to be tilted for any direction by pulling the whip element section lightly. And it eliminated troublesome antenna detouchment when your car is parked in the garage.

Adjustment.

THE SUPER GAINER series antennas are all factory adjusted and do not require any adjustment. If center frequency of the antenna has to be altered, loosen two set screws at the top of tilttable whip section and put the element in and out to have best vswr at desired center frequency. Be sure to fasten the screws after the adjustment.

Note

1. The antenna bracket has to be well-bonded to the body of your car at the bottom of the bracket. Insufficient grounding of the antenna through the bracket may invites impedance mismatching and high vswr ratio(6m).
2. Since those set screws being used throughout the antenna may be loosened due to the vibration during driving, they have to be refastened from time to time after several drives especially the antenna is right off from the package.
3. Do not drive the car with the antenna tilted, since whip element moves freely when the antenna is tilted.
4. Be careful not to be bit your finger into the tilttable whip section when the antenna is being erected.
5. Band coverage on 6m band is adjusted for FM band (51~52MHz) operations.

Specifications

Gain	2.15dBi (6m), 3.0dBi (2m), 5.8dBi (70cm)
Max. power rating	100W
Impedance	50 ohms
VSWR	Less than 1.5:1
Length	1.07m (42.1")
Weight	340g (0.75 lbs.)
Connector	UHF
Type	1/4 wavelength (6m), 1/2 wavelength C-Load radialless (2m), Two-5/8 wavelength phased element C-Load radialless (70cm)

Part name (number)

76101	Upper element
76102	Phase inductor
76103	Lower element
76104	Set screw
76105	Fold over structure section
76106	Impedance matching section
76107	Hexagonal wrench